

CLEVERTOUCH®



CTMOB.EU CLEVERTOUCH floorlift trolley with CE incl. EU powercable

Safety and optimal flexibility in class

The CTMOB.EU offers you great flexibility in the use of your touchscreen. Due to the large range of the high-low adjustment, this trolley makes your touchscreen suitable for ergonomic use by every person. Thanks to the mobile frame, you can effortlessly move your touchscreen within your classroom. Or even move your touchscreen to another room completely.

The CTMOB.EU is equipped with anti-collision, a blocking protection. When the screen touches something during a movement, the movement stops and the lift goes back a bit in the opposite direction.

Convenience for the installer

For the installer, CTMOB.EU offers large installation convenience. Mount the separate mounting arms to the touchscreen first, then easily hang them in the lift system and lock them. Never again search for the right holes with a heavy screen in your hands! By default, the CTMOB.EU has two expressible 76 mm plates in which you easily install a (double) wall socket. It also has expressible plates for placing Neutrik® chassis parts for USB, network, audio, etc.

CTMOB.EU also for the business professional



The CLEVERTOUCH height adjustable systems have been developed for the education market. Due to the great ease of use and the excellent price-quality ratio, these systems also find their way to the corporate market.

BENEFITS

- Large flat panel interface mount with max. VESA 800x600
- Easy to remove/service position of mounting arms
- VESA indicator on mounting base
- With special expressible plates to easily install wall sockets and Neutrik® chassis parts for USB, network, audio, etc.
- Wider baseframe, offering maximum stability with large flat panels

FEATURES

Minimum length:	912 mm	Mobile/fixed:	Mobile
Maximum length:	1562 mm	Height adjustment:	Electr. 650 mm, speed up to 38 mm/s
Weight:	45.05 kg	Bracket/interface:	Included
Colour:	Black	Type bracket/interface:	VESA
Maximum load:	120 kg	Range bracket/interface:	Max. VESA 800x600
Screen position:	Landscape, Portrait	Cable duct:	30 mm Ø
Inch range:	Max. 86 inch	Other information:	Standard equipped with anti-collision

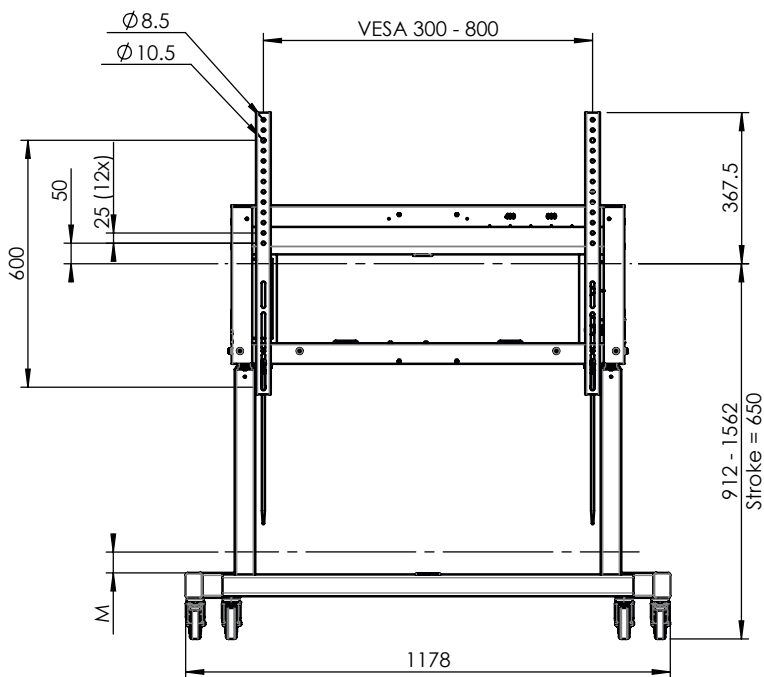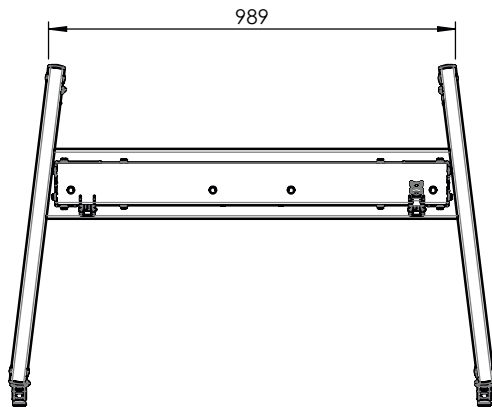

M = minimal free space of 51mm

