

VIEWBOARD ViewBoard IFP8633


Key Features

- Integrated with myViewBoard software
- Multi-tasking capabilities for enhanced lesson delivery
- Embrace simplicity and organization with the USB-C one-cable solution, offering 65W of Power Delivery.
- Intuitive user interface and fast app launch for smooth operation
- Powered by Android 11

Product **Description**

OS:58 Tue Autilitation

The ViewBoard IFP33 Series harmonizes a touch display with versatile software to create a comprehensive classroom solution for interactive and engaging learning. This interactive flat panel delivers exceptional image quality in 4K UHD, thanks to cutting-edge bonding technology that provides clearer colors, enhanced contrast, and reduced glare. The 40-point touchscreen interface, equipped with Ultra Fine Touch Technology, empowers students and teachers to collaborate seamlessly, using either their fingers or dual-tip pens, for an intuitive pen-on-paper experience. Powerful built-in front-facing speakers and a USB-C port sort out for a complete and convenient multimedia experience. The ViewBoard IFP33 Series is preinstalled with myViewBoard to offer advanced lesson delivery options for teachers and powerful device management tools for administrators.

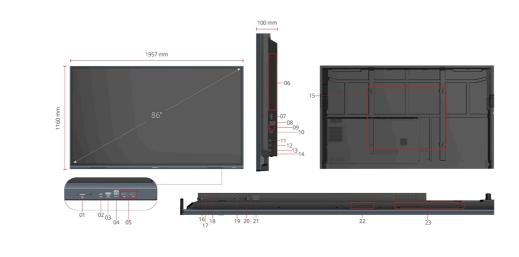

https://www.viewsonic.com/ph/products/sheet/IFP8633

ViewSonic ViewBoard IFP8633 ViewBoard® 86" 4K Interactive Display - Datasheet - ViewSonic Philippines

www.viewsonic.com

2. USB C 3. HDMI 1 4. TOUCH 1 5. USB 3.0x2 6. OPS Slot 7. RS-232 9. USB 2.0x2 10. TOUCH 2 11. HDMI 2 12. HDMI 3 13. HDMI OUT 14. USB

Visit Us

16. SPDIF 17. AUDIO in 18. AUDIO out 19. VGA 20. Power On/OFF 21. AC IN

23. Sensor Mount

DISPLAY **BUNDLE SOFTWARE** Panel Size: 86" myViewBoard Basic Annotation Software Whiteboard TET I CD module with Panel Type: mvViewBoard for DLED backlight, VA Windows (Embedded in Pro Annotation Software: 1913.04(H) x 1083.96 optional Windows Slot-Display Area (mm): (V) in PC) 16.9Aspect Ratio: Wireless Presentation: myViewBoard Display UHD Wireless Presentation with Touch Resolution: Yes 3840x2160(Pixels) Feedback: Viewboard Cast: Colors: 1.07B colors SPECIAL FEATURES Brightness: 400 nits (combine slot-in PC/Android/HDMI USB port) Front 5000:1 (max. with DCR All-in-one USB port: Contrast Ratio . "SmartPort™ USB" to enabled) all channels. Response Time: 8ms Simple LAN sharing between IFP 10/100M for Android & Viewing Angles: H=178, V=178 Slot-in PC and slot-in device: Backlight Life: 50,000 Hours (Min.) Light Sensor: Yes Hardness: 9H Anti-POWER Surface Treatment: glare coating 100-240V AC Voltage: Orientation: Landscape Consumption: On:154W ; Off: ≤ 0.5W PLATFORM **ERGONOMICS** Quad-core ARM Cortex Processor: Wall Mount (VESA®): 800*600 (A55*4) **OPERATING CONDITIONS** RAM: 4GB DDR4 0°C to 40°C Temperature (° C): Storage: 32 GB 20% ~ 80% RH non-TOUCH Humidity: condensina Ultra Fine Touch Type/ Tech: DIMENSIONS (W X H X D) Technology 1957 x 1160 x 100 mm Touch Point: 40 points touch Physical (inch / mm): / 77 x 45.7 x 3.9 in INPUT 2110 x 225 x 1283 mm Packaging (inch / mm): HDMI-IN 2.0 x 3 /83 x 8.9 x 50.5 in HDMI: (3840x2160 @60Hz) WEIGHT RGB / VGA: x1 Net (lb / kg): 129.1lb/58.55kg Audio: x1 Gross (lb / kg): 167.3lb/75.9kg RS232 x1 REGULATIONS x1 (Optional Intel FCC/ICES003, EPEAT, CE EMC, LVD or CB, RoHS Green OPS: Standard OPS) BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE, BSMI, BIS x1 (Optional VB-WIFI-WiFi: 002/VB-WIFI-004/VSB-PACKAGE CONTENTS 050) 1. 3m power cord by ship area 2. Remote control with AAA OUTPUT battery 3. 3m touch USB cable 4. Touch pen x 2 (VB-PEN-009) 5. Quick Start Guide + Compliance statement 6. HDMI: HDMI 2.0 x1 RS232 adapter 7. Clamp x 5 8. Camera Plate 9. Screw x 8 (camera 2+2, wall mount 4) 10. HDMI cable 3m Audio: x1 **COMPATIBLE SLOT-IN PC** SPDIF: x1 VPC2-O series/VPC2-O-1B series/VPC12-WPO-15/16 LAN RJ45: x2 USB USB3.0:Front x2, Rear Type A: x2; USB2.0 x1 Type B: x2 (Rear x1 + Front x1) Front*1 (PD65W + DP1.2 + Data USB2.0 Type C: + 10M/100M sharing) **SPEAKERS** 16W x 2 TOP CAMERA PLATE Yes

EMBEDDED OS

Android 11

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

