

# ViewSonic® PROJECTOR PA503S

## Key Features


Higher Brightness. Longer Lamp Life.

- Auto Power Off
- 22,000:1 contrast ratio
- SuperColor™ Technology
- 5 colour modes
- Vertical Keystone



## Product Description

The ViewSonic PA503S offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503S projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColour™ technology offers a wider range of displayable colour ensuring true-to-life colour accuracy in both bright and dark environments without sacrificing image quality.

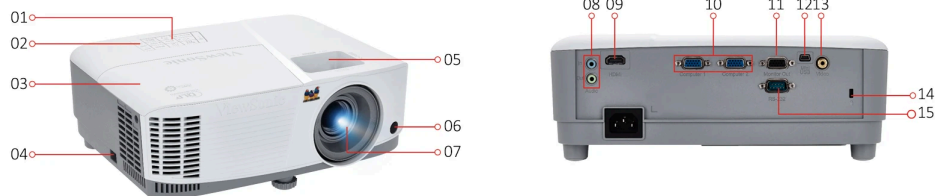

1. Keypad
2. LED indicator
3. Lamp cover
4. Security lock
5. Zoom/Focus
6. Front IR
7. Projection Lens

8. Audio in/out
9. HDMI
10. Dual VGA
11. VGA out
12. Mini USB
13. Video
14. Kensington® Lock Slot

15. RS232

Visit Us

[www.viewsonic.com](http://www.viewsonic.com)



**SPECIFICATION**

|   |  |
|---|--|
| Native Resolution:                            | 800x600                                    |
| Brightness:                                   | 3800 ANSI Lumens                           |
| Contrast Ratio with SuperEco Mode:            | 22000:1                                    |
| Display Color:                                | 1.07 Billion Colors                        |
| Light Source Type:                            | Lamp                                       |
| Light Source Life (hours) with Normal Mode:   | 5000                                       |
| Light Source Life (hours) with SuperEco Mode: | 15000                                      |
| Lamp Watt:                                    | 190W                                       |
| Lens:   | F=2.56-2.68, f=22-24.1mm                   |
| Projection Offset:                            | 120%+/-5%                                  |
| Throw Ratio:                                  | 1.96-2.15                                  |
| Optical Zoom:                                 | 1.1x                                       |
| Digital Zoom:                                 | 0.8x-2.0x                                  |
| Image Size:                                   | 30"-300"                                   |
| Throw Distance:                               | 1.19m-13.11m(100"@3.98m)                   |
| Keystone:                                     | +/- 40° (V)                                |
| Audible Noise (Normal):                       | 31dB                                       |
| Audible Noise (Eco):                          | 27dB                                       |
| Input Lag:                                    | 16ms                                       |
| Resolution Support:                           | VGA(640 x 480) to FullHD(1920 x 1080)      |
| HDTV Compatibility:                           | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p |
| Video Compatibility:                          | NTSC, PAL, SECAM                           |
| Horizontal Frequency:                         | 15K-102KHz                                 |
| Vertical Scan Rate:                           | 23-120Hz                                   |

**INPUT**

|                                     |                        |
|-------------------------------------|------------------------|
| Computer in (share with component): | 2                      |
| Composite:                          | 1                      |
| HDMI:                               | 1 (HDMI 1.4/ HDCP 1.4) |
| Audio-in (3.5mm):                   | 1                      |

**OUTPUT**

|                    |    |
|--------------------|----|
| Monitor out:       | 1  |
| Audio-out (3.5mm): | 1  |
| Speaker:           | 2W |

**CONTROL**

|                             |   |
|-----------------------------|---|
| RS232 (DB 9-pin male):      | 1 |
| USB Type Mini B (Services): | 1 |

**OTHERS**

|  |   |
|--|---|
| Power Supply Voltage:                    | 100-240V+/- 10%, 50/60Hz (AC in)  |
| Power Consumption:                       | Normal: 260W Standby: <0.5W   |
| Operating Temperature:                   | 0~40°C  |
| Carton:                                  | Brown   |
| Net Weight:                              | 2.2kg   |
| Gross Weight:                            | 3.24Kg  |
| Dimensions (WxDxH) with Adjustment Foot: | 294x218x110mm   |
| Packing Dimensions:                      | 365x300x188mm   |
| OSD Language:                            | English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages |
| User Guide Language:                     | English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages   |

**STANDARD ACCESSORY**

|                 |  |
|-----------------|--|
| Power Cord:     | 1  |
| VGA Cable:      | 1  |
| Remote Control: | 1  |
| QSG:            | Yes  |
| Air Filter:     | Yes (CN Only)                                      |
| Warranty:       | *Warranty offered may differ from market to market |

**OPTIONAL ACCESSORY**

|                     |             |
|---------------------|-------------|
| Lamp/Light Source:  | RLC-108     |
| Air Filter:         | RSPL        |
| Wall/Ceiling Mount: | PJ-WMK-007  |
| Carry Bag:          | PJ-CASE-008 |



Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

