



GENERAL

Product Name75" High Brightness Window Display

PANEL

Screen Size75 inch
LCD Panel TypeIPS LCD
Resolution3840 x 2160
BacklightLED
Brightness3000 nits
Contrast Ratio1200 : 1
Colour Depth8 bits
Response Time6
Viewing Angle178° / 178°

INTERNAL PLAYER

ProcessorRK3576, Octa core (Quad core Cortex-A72+Quad Core Cortex-A53, with a maximum frequency of 2.2GHz)
Main Memory Interface4GB DDR3
Storage (FDM)eMMC 64GByte(2GB occupied by o/s)
MultimediaH.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO portsUSB x2, TF Card Slot x1, Wifi x1,Rj45 x1, HDMI input x1
Operating SystemAndroid 14
NetworkWlan 802.11 b/g/n (2.4GHz) ,RJ45

POWER

Power Supply	Internal
Mains Power	100 ~ 240 V, 50/60 Hz
Power Consumption	700 W

USER INTERFACE

Language	English
OSD Menu	Multi-language

OPERATING CONDITIONS

MTBF: (hrs)	50000
Storage Temperature °C	-20 ~ 65
Working Temperature °C	0 ~ 50

CERTIFICATION



Certification	CE, FCC&Rohs
---------------	--------------

DIMENSIONS

Dimension (LxHxD)	1682 x 961 x 74.3 mm
CTN Dimension (LxHxD)	1820 x 1100 x 231 mm
Weight (N.W.)	52 kg
Weight (G.W.)	68 kg

MECHANICAL SPECS

Orientation	Portrait / Landscape
Cabinet Colour	Black

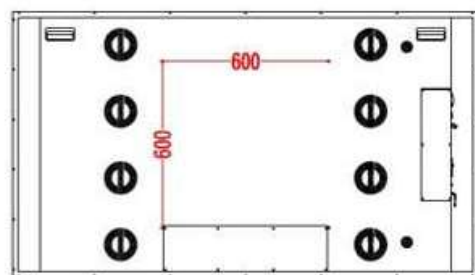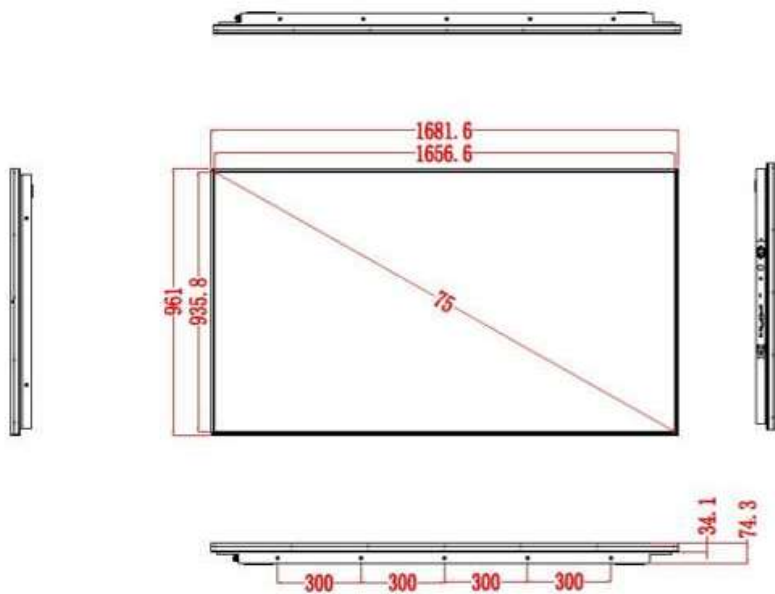

SOL-WD43CSX-DS-3000-700



GENERAL

Product Name 43" Ceiling Mounted Frame Hung Window Display, Double Side

PANEL

Screen Size 43 inch
LCD Panel Type IPS LCD
Resolution 1920 x 1080 / 1920 x 1080
Backlight LED
Brightness 3000nits / 700nits
Contrast Ratio 3000:1
Viewing Angle 178° / 178°

INTERNAL PLAYER

PCBA Type Double
Processor T982, Quad-core A55,1.9GHz
Main Memory Interface 4GB
Graphics Mali-G52 GPU / Support 4K/8K H.265 video decoding
Storage (FDM) eMMC 16GByte(2GB occupied by o/s)/64G Option
Multimedia MPEG-1,MPEG-2,MPEG-4,H.263, H.264,VC1,RV etc.,Max 1920x1080p, MP3/WMA, JPEG,BMP etc
IO ports DC x 1, HDMI IN x 1, RJ45 x 1, Headphone plug x x1, USB3.0 x 1, USBOTG x 1
Operating System Android 13
Network WLan 802.11 b/g/n (2.4GHz) ,RJ45

POWER

Mains Power	100 ~ 240 V, 50/60 Hz
Power Consumption	340 W

USER INTERFACE

Language	English
Speaker	N/A
OSD Menu	Multi-language

OPERATING CONDITIONS

MTBF: (hrs)	50000
Storage Temperature °C	-20 ~ 65
Working Temperature °C	0 ~ 55

CERTIFICATION


Certification	CE, FCC&RoHS
---------------	--------------

DIMENSIONS

Dimension (LxHxD)	971.1 x 638.5 x 74 mm
CTN Dimension (LxHxD)	1160 x 810 x 230 mm
Weight (N.W.)	21 kg
Weight (G.W.)	33 kg

MECHANICAL SPECS

Orientation	Portrait
Case Material	Metal
Cabinet Colour	Black / White

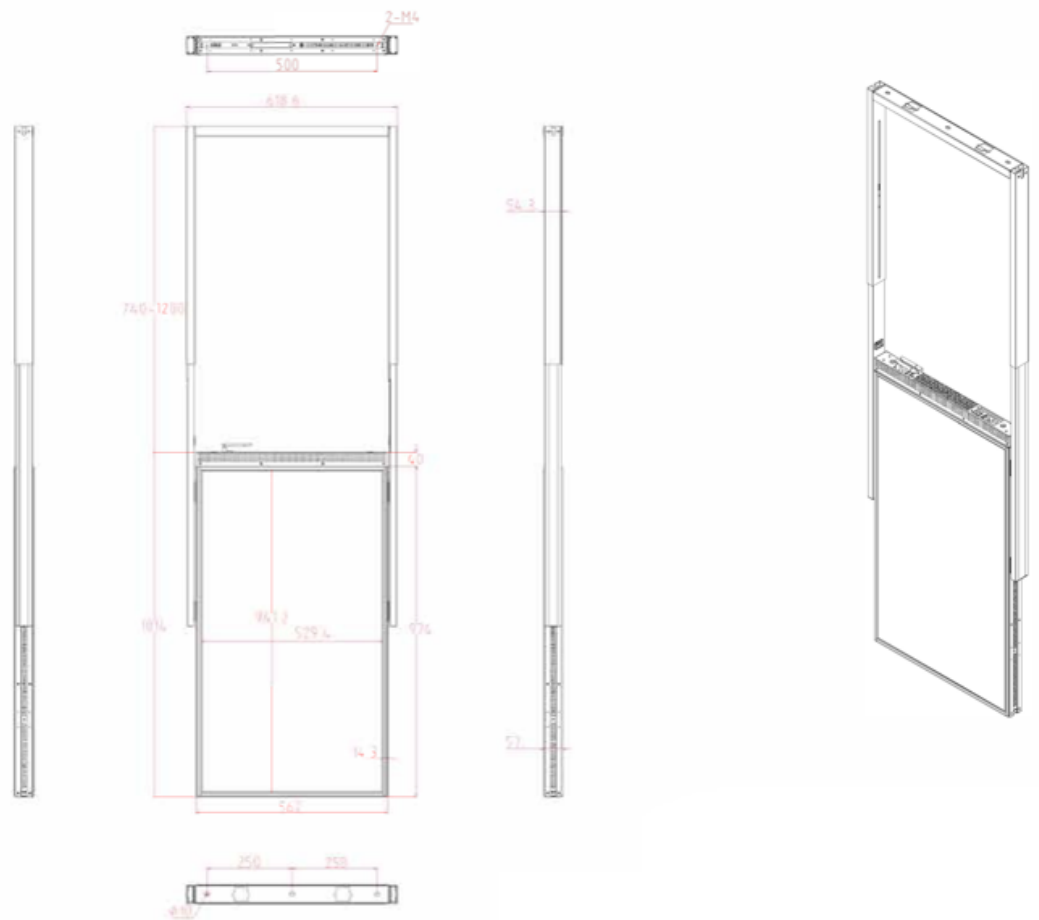

Full Customisation Support

Design



Appearance



Project



Package



Logo

Screen



Size



Brightness



Resolution



Interface

Hardware



CPU



RAM



ROM



Battery

System



Android



Windows



Linux



Monitor

Function



Camera



Print & Scan



Touch



WLAN



NFC



RFID



Payment



Solar Power



Product Information Disclaimer

Specifications are subject to change without notice. While we strive for accuracy, Solus Vision does not guarantee the completeness or reliability of the information provided.

Product images are for illustrative purposes only and may differ from the actual product. Performance may vary based on installation, environment, and usage conditions.

For the latest specifications, availability, and support, please visit www.solus-vision.com or contact our team.