

# DABLIUTOUCH

Mod. L1R|PRO

4K ULTRAHD



	65" Cod. L1R-146A	75" Cod. L1R-147A	86" Cod. L1R-148A
Display Area	1432x815 mm	1651x928 mm	1895x1065 mm
Contrast Ratio	5000:1	5000:1	4000:1
Brightness(typ)	450 cd/m2	450 cd/m2	450 cd/m2
Dimensions	1489 x 897.9 x 85 mm	1710 x 1022 x 85 mm	1953.74 x 1159.41 x 88.1 mm
Pack Dimensions	1657 x 185 x 1007 mm	1873 x 1134 x 202 mm	2110 x 222 x 1270 mm
Wall-hanging Screw	M8x20mm	M8x20mm	M8x20mm
Net Weight	31.6 KG	43.55 KG	55.82 KG
Gross Weight	42.12 KG	57.4 KG	158.44 KG
VESA	600x400mm	800 x400mm	800 x600mm
Requirements	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A	100-240V 50/60Hz 4.5A
Consumption (Max)	450 W	480 W	550W
Consumption (Standby)	≤0.5W	≤0.5W	≤0.5W

Android 14 8 GB 256 GB 65" | 75" | 86"

## Display

Screen Type	TFT LCD
Aspect Ratio	16:9
Viewing Angle	178°
Resolution	4K UHD (3840 x 2160 @ 60 Hz)
Back Light Unit	DLED OD20
Color Gamut	NTSC 72%
Response Time	6.5 milliseconds or less
Refresh Rate	60Hz
Display Color	1.07Billion
Glass Hardness	9H (pencil), 7 (Mohs)
Glass Type	AG Glass 3mm
Bonding Type	Zero bonding

## Interactivity

Touch Points	50
Touch Technology	IR
Touch Accuracy	1mm (90% Central area)
Max T. Resp. Time	5 milliseconds
Tracking Rate	≥5m/s
ScanRate	200 Hz
Pen Type	Battery-less
Pen Holder	yes
Touch Hight	1.5mm
Compatibility	Windows® 7-10 OS X® 10.8 to 10.11   macOS® Sierra 10.12.1* or later Linux® Ubuntu® 18.04 LTS Chrome OS™

## Interface( Rear )

USB3.0	2	1	2	1	1	2	1	2
USB2.0	1	1	1	1	1	1	1	1
Touch	1	1	1	1	1	1	1	1
Type C (PD 15w)	1	1	1	1	1	1	1	1
WIFI6+BT5.2	1	1	1	1	1	1	1	1
DP IN	1	1	1	1	1	1	1	1
HDMI IN	1	1	1	1	1	1	1	1
1.4 (HDMI IN)	1	1	1	1	1	1	1	1
2.0 RS232	1	1	1	1	1	1	1	1
RJ45	1	1	1	1	1	1	1	1
1000M	1	1	1	1	1	1	1	1
HDMI	1	1	1	1	1	1	1	1
OUT SPDIF	1	1	1	1	1	1	1	1
OUT	1	1	1	1	1	1	1	1
Line OUT	1	1	1	1	1	1	1	1
Mic IN	1	1	1	1	1	1	1	1
Audio IN	1	1	1	1	1	1	1	1
VGA IN	1	1	1	1	1	1	1	1
OPS slot (80pin)	1	1	1	1	1	1	1	1
WIFI&Blue tooth	1	1	1	1	1	1	1	1

## Computing

Operating System	Android™14	8GB	256GB
RAM	RK3576	A72*4+A53*4	Mali
ROM	G52	MC3	Yes
Chip	WIFI6+BT5.2	German, English,	
CPU	Spanish, Fren-		
GPU	ch, Italian, Hungarian, Croatian,		
OTA	New Zealand language, Arabic,		
WIFI&Blue tooth	Russian.10 languages		
OSD			

## Interface( Front )

Type C PD 100w	1
USB 3.0	3
Touch USB 2.0	1
HDMI-IN 2.0	1

## Audio

Speaker	Face to front
Power	2*20W

## Environmental

Operating Temperature	0°C- 40°C
Storage Temperature	-20°C~60°C
Operating Humidity	20%-80%R
Storage Humidity	H
	20%-80%R
	H


## Included accessories

Pen x2 , remote control x1, wall mount x1, power cable x1, manual x1, Usb touch cable x1, HDMI cable x1

## Optional module OPS

(120 x 180 x 30 mm)

## Technical drawings

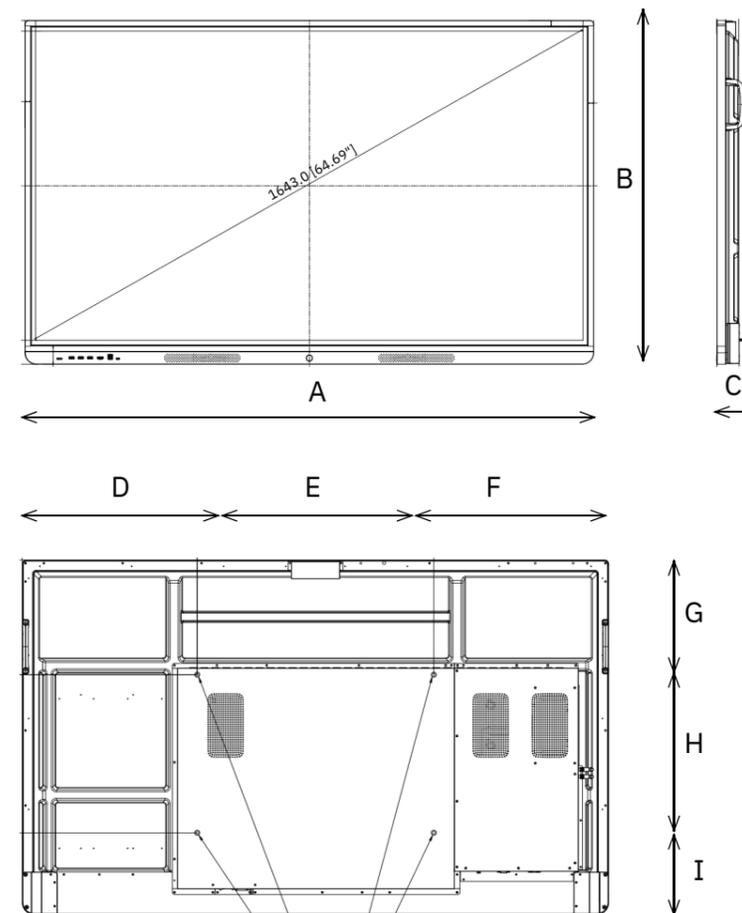

	65" mm	75" mm
A	1487,2	1708,9
B	897	1021,7
C	87,8	87,9
D	443,6	454,5
E	600	800
F	443,6	454,5
G	290,2	212,5
H	400	400
I	206,8	409,2

	86" mm
A	1953,74
B	1159,41
C	88,1
D	576,87
E	800
F	576,87
G	305,81
H	600
I	253,6

© 2025 Wacebo. All rights reserved.