

# PRO48HBT70CS



# BLUSTREAM

## Custom Pro 4x8 HDBaseT™ CSC Matrix

### Description

Our Custom Pro 4x8 HDBaseT™ CSC Matrix offers unprecedented 4K HDR performance for the custom installation market. The PRO48HBT70CS is a HDMI 2.0 4K 60Hz 4:4:4 HDCP 2.2 Matrix utilising CSC technology to deliver HDMI, Bi-directional IR, PoH (PoE) up to lengths of 70m over a single CAT cable (4K with HDR up to 40m), with independent down-scaling of 4K video inputs on the CSC HDBaseT™ outputs to allow displays only capable of supporting lower video resolutions to receive 4K video while still showing maximum original.


The Matrix also provides advanced features including audio breakout and a web browser interface module for control and configuration of the matrix.

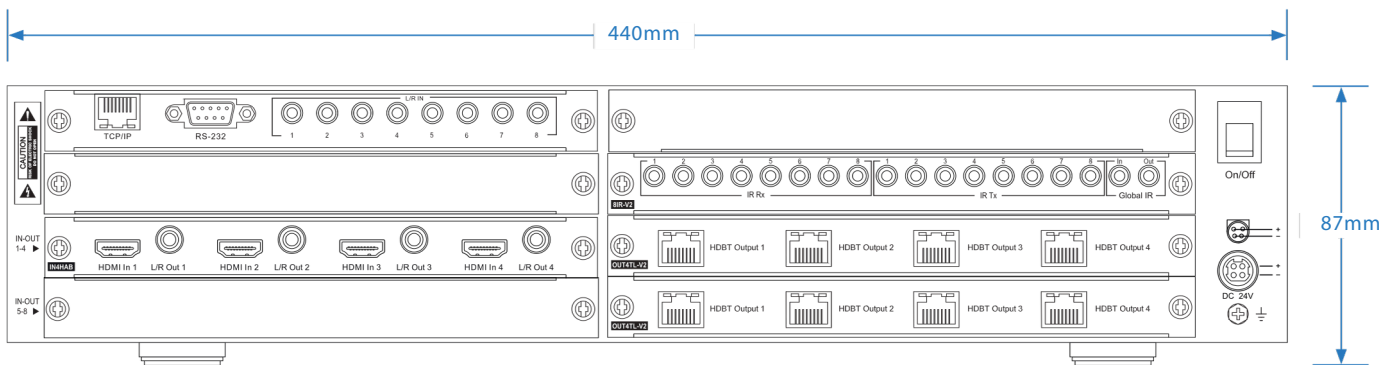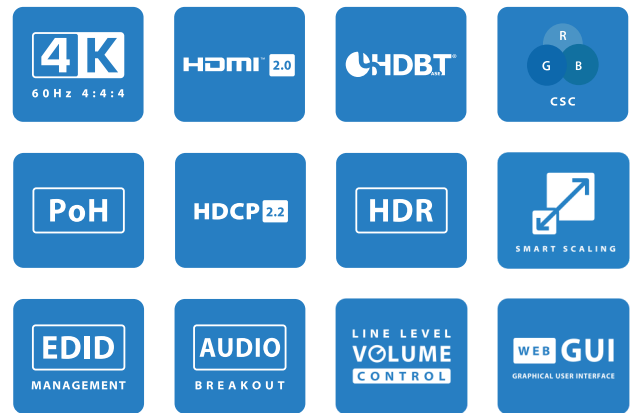

### Key Features

- HDBaseT™ technology offering distribution of video and audio over a single CAT cable
- Advanced Colour Space Conversion (CSC) supports HDMI 2.0 18Gbps specification including HDR
- Features 4 x HDMI inputs which can be independently routed to 8 x HDBaseT™ outputs
- Supports 4K 60Hz 4:4:4 UHD video up to 40m
- Independent down-scaling of resolutions up to 4K 60Hz 4:4:4 video input to the following formats:
  - 1080p 60Hz (for screens that do not support 4K)
  - 4K 60Hz 4:2:0 (for screens that do not support full 4K 60Hz 4:4:4)
- Supports 4K HDR
- Extends HDMI 1080p video up to 70m
- Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K HDR
- Supports bitstream passthrough of multichannel surround sound including object-based audio formats in line with HDMI specifications.
- Analogue audio input can be embedded onto any HDMI input
- Web interface module for control and configuration of Matrix
- Supports bi-directional IR
- Supplied with Blustream IR receivers and emitters
- Control via front panel, IR, RS-232 and TCP/IP
- Supports PoH (Power over HDBaseT™) to power compatible HDBaseT™ receivers
- 3rd Party drivers available for major control brands
- 2U Design for 19" rack mount integration - Mounting kit included
- Advanced EDID management
- HDCP 2.2 compliant

### Transmission Distance via Cat6



- 4K 60Hz 4:4:4
- 1080p



## Connectivity

- **VideoInputConnectors:** 4 x HDMI Type A, 19-pin, female
- **VideoOutputConnectors:** 8 x HDBaseT™ RJ45 connector
- **AudioInputConnectors:** 8 x 3.5mm stereo jack (L/R)
- **RS-232serialport:** DB-9, female
- **TCP/IPControl:** RJ45, female
- **IRInputports:** 9x 3.5mm stereo jack

## Specifications

- **Dimensions (W x D x H):** 440mm x 282mm x 87mm
- **Shipping Weight:** 5kg
- **Operating Temperature:** 32°F to 104°F (0°C to 40°C)
- **Storage Temperature :** -4°F to 140°F (-20°C to 60°C)
- **Rack-Mountable:** 2U rack height, rack ears included

## Included Accessories

|                |                              |
|----------------|------------------------------|
| IR Accessories | 9 x IRR, 9 x IRE, 8 x IR-CAB |
| IR Remote      | 1 x REM88                    |
| Rack Mount     | 2 x 19" Wings                |
| Power Supply   | 24V/8A PSU                   |

## Control

|                   |
|-------------------|
| TCP/IP            |
| RS-232            |
| iOS / Android App |
| IR                |
| Front Panel       |

## RS-232 Connectivity

|               |       |
|---------------|-------|
| Baud Rate:    | 57600 |
| Data Bit:     | 8-Bit |
| Parity:       | None  |
| Stop Bit:     | 1-Bit |
| Flow Control: | None  |

## Regulatory Compliance



## Compatible Receivers

|             |
|-------------|
| HEX70CS-RX  |
| HEX100CS-RX |

## Colour Space Conversion (CSC) Technology in HDBaseT™

Due to the data rate of HDBaseT™ technology being capped at 10.2Gbps, it is unable to pass the latest native 4K UHD resolutions of 4K 60Hz 4:4:4. There is now a requirement to integrate video resolutions with data speeds up to 18Gbps across a multi-zone AV environment. Blustream have implemented CSC (Colour Space Conversion) technology into our latest products to ensure 4K HDR signals can now be supported over the 10.2Gbps infrastructure of HDBaseT™\*.

Colour Space Conversion reduces the data rate of the HDMI signal by converting the colour space (or Wide Colour Gamut) from 4:4:4 or 4:2:2 to a lower format. Within Colour Space Conversion technology the native resolution, frame rate and colour depth all remain constant from end to end. The only part of the signal that is converted during transmission is the colour gamut.

\*Blustream CSC products are not compatible with advanced HDR formats such as HDR10+, nor do they support video technologies utilizing 12-bit dynamic or static metadata