DATA SHEET
PARLÉ™ DCM-XEX EXPANSION BEAMTRACKING™ CEILING MICROPHONE FOR DEVIO UCX



The Parlé DCM-XEX is an expansion Beamtracking ceiling microphone designed specifically for Devio UCX meeting room systems. It extends microphone coverage in larger or more complex spaces while maintaining the clean, uncluttered look of a ceiling-mounted solution.

The black surface-mount finish blends into dark ceilings, and Beamtracking technology automatically follows active talkers so participants can speak naturally throughout the room. Purpose-built for Devio UCX, DCM-XEX expands professional ceiling microphone coverage without requiring a Tesira DSP platform.

FEATURES

- Built for Devio UCX — An expansion Beamtracking ceilingmicrophonefor Devio UCX systems.
- Extend room coverage seamlessly — Beamtracking technology withfour90°zonescaptures voices across a full 360° area, automatically mixing active talkers without manual lobe aiming.
- Blend into modern interiors — the low-profile, 5.90-inch (150mm) blackceilingdesign delivers discreet, surface-mounted installation.
- Expand existing Parlé systems easily — functions as an expansion microphonewhenpairedwith a DCM-X or DCM-XA; not a standalone device.
- Simplify installations — a single CAT5 connection links directly tothehostmicrophone's network box for clean, efficient wiring.
- Maintain consistent conference audio — uses only one AECchannelpermicrophone,evenwhen daisy-chaining a TCM-XEX.
- Provide intuitive visual feedback — the LED mute statusindicatorclearlyreflectsmicrophone state during meetings.
- Integrate confidently with UC platforms — Certified forMicrosoft Teamsforreliableperformance in modern collaboration environments.
- Rely on durable, compliant hardware — UL 2043 plenum rated,CE marked,UL listed, RoHScompliant, TAA compliant, and backed by a five-year warranty.

ARCHITECTS & ENGINEERS SPECIFICATIONS

The Beamtracking™ ceiling microphone shall be designed exclusively for use with Biamp® Devio® UCX systems as an expansion microphone connected to the network box of a Parlé™ DCM-X or DCM-XA. The Beamtracking ceiling microphone shall utilize a proprietary digital protocol via an RJ-45 connector for audio networking. The Beamtracking ceiling mount microphone shall contain a sixteen-element digital microphone array, and shall provide four 90-degree zones for 360 degrees of coverage. The Beamtracking ceiling microphone shall offer multidirectional beamforming and automatic signal tracking capabilities. The Beamtracking technology shall operate in conjunction with acoustic echo cancellation technology (AEC) in accordance with U.S. Patent 9659576. The Beamtracking ceiling microphone shall be suitable for use in air handling spaces in accordance with UL 2043. The Beamtracking ceiling microphone shall be CE marked, UL listed, and compliant with the RoHS directive. Warranty shall be three years. The Beamtracking ceiling microphone shall be Parlé™ DCM-XEX.

FutureVisuals

PARLÉ DCM-XEX SPECIFICATIONS

GENERAL:

Height:	(excluding ceiling mount): 0.7 inches (17 mm)
Diameter:	5.9 inches (150 mm)
Weight:	0.7 lbs (340 g)

ENVIRONMENTAL:

Ambient Temperature Range: 32-104° F (0–40° C) Humidity: 0–95% relative humidity (non-condensing) Altitude: 0-10,000 ft (0–3000m) MSL

POWER:

Power:	Custom/Proprietary
Max Distance Between Devices::	33 feet (10 meters) between DCM-XEX and DSP host device

NETWORK:

Network Connection(s):	
Network Box Connectors - Three RJ-45 One:	One between DCM-X network box and switch
	One between the network box and microphone
	One between DCM-X network box and DCM-XEX

AUDIO:

Microphone Technology: 16-Element Digital ArrayAmbient Frequency Response: (150 Hz - 16 kHz): ± 3dB Polar Pattern: Active Beamformed SNR (at 1kHz, 94dBSPL A-Weighted): > 76dB Maximum SPL (at < 1% THD): 109dB Dynamic Range (THD+N < 1%): 92dB, A-Weighted Indicators: Mute Indicator (Green/Red LED) Digital Interface: Custom/Proprietary Connector: RJ-45 (cable length 6.6 feet [2 meters])

CERTIFIED SOLUTIONS:

TAA Compliant:	TAA Compliant

COMPLIANCE:

Certifications:	FCC Part 15B (USA)
	CE marked (Europe)
	UL and C-UL listed (USA and Canada)
	RoHS Directive (Europe)
	Evaluated to the requirements of UL 2043 and is suitable for use in air handling spaces

OPTIONAL ACCESSORIES



BPAK
Backpackadapter kit



Seismic Cable Adapter
Cableadapterfor TCM plenum boxes




TB-1
Tile bridge for TCM plenum boxes




TCM-X-FM
FlushMountKit



TCM-X-DK
Plenumattachmentfor drywall ceilings



TCM-X Installation Tool
Holesawanddriver




Plenum Box 12x12
Chicagocompliant plenum box





C5E-10-P, C5E-25-P
10ft and 25ft pre-terminated plenum rated Cat 5e cables



TCM-X-PM
PoleMountSolution

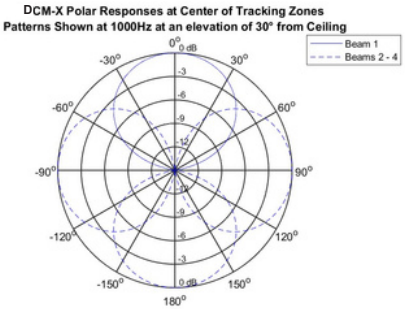

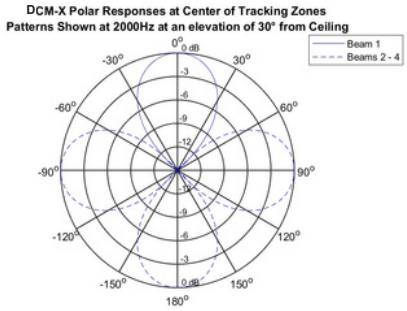

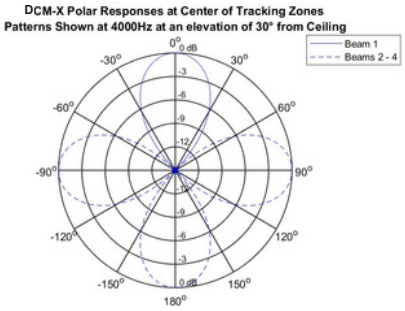

Biamp, Tesira, Parlé, Devio, and Beamtracking are either trademarks or registered trademarks of Biamp Systems, LLC in the United States and other countries. Other product names referenced may be trademarks or registered marks of their respective owners and Biamp Systems is not affiliated with or sponsored by these companies.

FutureVisuals