



Key Features

- Keep content visible in bright spaces with 700-nit brightness and anti-glare haze
- Deliver smooth 4K playback and multitasking powered by Android 14 octa-core processing
- Enhance user interaction with responsive 10-point multi-touch capability
- Integrate easily into signage systems via USB-C, HDMI, and CMS compatibility
- Centralize remote management using ViewSonic Manager™ scheduling and monitoring tools

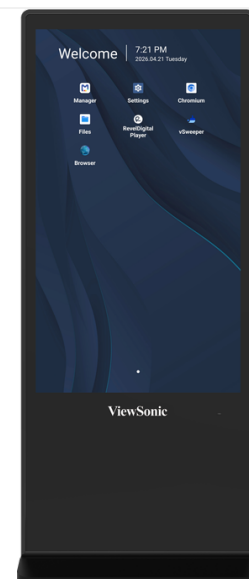

Product Description

The ViewSonic EP5543T is an interactive commercial ePoster designed for wayfinding and self-service applications in hospitality and higher education environments. Featuring responsive 10-point touch, 700-nit brightness with 25% anti-glare haze, and reliable 24/7 operation, the EP5543T delivers clear, engaging experiences in brightly lit commercial spaces. An all-in-one freestanding design with a built-in Mini PC compartment, integrated AC power output, and hidden cable routing streamlines deployment without wall mounting or complex IT setup. Built on an octa-core Android 14 platform with 8GB RAM and 128GB storage, the EP5543T delivers smooth 4K multimedia playback and reliable commercial performance. Pre-installed with Revel Digital CMS and supporting additional platforms via Google Play Store, it enables centralized content management with support for JPEG, PNG, MP4, and HTML5. Ideal for campus directories, library navigation, visitor wayfinding, and interactive event schedules, the EP5543T transforms traditional signage into an engaging self-service information hub.

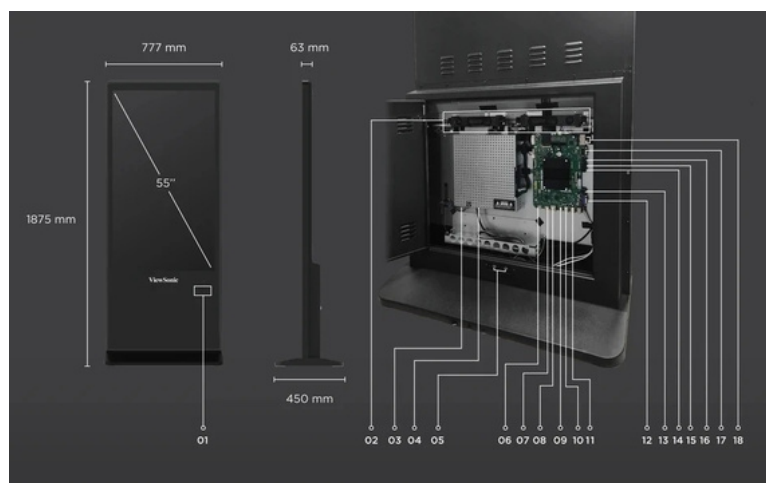

- | | | |
|-------------------------|-----------------------------|-----------------------|
| 1. Remote IR sensor | 8. DP-In x1 & HDMI-In x1 | 15. Audio Out |
| 2. Internal Speakers | 9. USB Type C | 16. SPDIF |
| 3. AC-IN & Power switch | 10. USB Type A 3.2 Gen 1 x2 | 17. RS-232 |
| 4. AC Out | 11. USB Type A 2.0 x2 | 18. LAN x2 (In & Out) |
| 5. USBx2 (rear housing) | 12. VGA In | |
| 6. HDMI-Out | 13. Audio In | |
| 7. HDMI-In | 14. Mic In | |

DISPLAY

Panel Size:	55"
Type/Tech:	TFT LCD (ADS type, DLED backlight)
Display Area (mm):	1209.6 (H) x 680.4 (V)
Aspect Ratio:	9:16
Native Resolution:	2160x3840
Colors:	1.07G (8 bit +FRC)
Brightness:	700 nits (typ.)
Contrast Ratio:	1200:1 (typ.)
Response Time:	8ms
Viewing Angles:	H=178, V=178 (typ.)
Backlight Life:	30,000 hours (typ.)
Surface Treatment:	Anti-Glare, pencil hardness 7H,
Orientation:	Haze=25%

TOUCH

Type/ Tech:	IR Recognition
Touch Resolution:	32768 x 32768
Touch Point:	10 points

INPUT

HDMI:	(2.0) x 2
RGB / VGA:	x1
DisplayPort:	(1.2)x1
Audio:	x1 (3.5mm)
MIC(Microphone):	x1 (3.5mm)
RS232:	x1

OUTPUT

HDMI:	x1
Audio:	x1 (Earphone out)
SPDIF:	x1

LAN

RJ45:	x2
-------	----

USB

Type A:	x4 (2.0x2 ; 3.0x2)
---------	--------------------

OTHERS

Type-Cx1 (USB2.0, DP1.2 , PD15W)

SPEAKERS

20Wx2

COMPATIBILITY

RGB PC/HDMI PC:	1920x1080@60Hz
HDMI:	2160x3840@60Hz
DisplayPort:	2160x3840@60Hz

ANDROID VERSION

14.0

MULTIMEDIA

Photo: JPG, BMP, PNG Video: MP4, MOV, MKV, DAT, MPG, MPEG, AVI, TS, WMV, RM, RMVB, FLV. Audio: MP3, WAV, AAC, AVI, MKV.

PRELOADED SOFTWARE*

RevelDigital Player
(Activation requires a separate subscription license, sold separately for Revel Digital)

Manager

POWER

Voltage:	100~240VAC +/- 10% wide range
Consumption:	61.7W (Typ.), 230W (Max.) Standby mode < 0.5W , Off mode <0.3W

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% non-condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	30.64 x 73.82 x 17.72 inches/ 778.5 x 1875 x 450 mm
Packaging (inch / mm):	38.19 x 80.08 x 23.98 inches/ 970x 2034 x 609 mm

WEIGHT

Net (lb / kg):	138.89 lbs / 63 kg
Gross (lb / kg):	159.84 lbs / 72.5 kg

REGULATIONS

cTUVus, FCC, EnergyStar 8.0, CE, CB, RoHS, Erp, EEL, WEEE.
--

PACKAGE CONTENTS

• Power cord • Remote control • Bottom metal cover and screws • Key • Quick start guide • Compliance statement
--

