

ViewSonic® VIEWBOARD IFP4320


Key Features

- Enhanced flexibility for various huddle spaces
- Smoother writing experience from 10-point intuitive In-cell Touch technology
- Simple and seamless content sharing with USB Type-C connectivity
- Wireless casting and remote management with myViewBoard™ ecosystem
- Built-in ViewBoard® Cast for simultaneous annotation and productive collaborations



Product Description

Give your huddle spaces the power and flexibility of hybrid collaborations with the sleek, compact ViewBoard® IFP4320 display. Designed to enhance smaller meeting spaces, the 43" screen boasts intuitive 10-point In-cell Touch technology for a smoother and more responsive writing experience with every tap, pinch, and swipe. Enjoy true interactivity and dynamic productivity with a single-cable plug-and-play solution from USB Type-C connectivity and seamless content sharing across different platforms. Integrated with myViewBoard ecosystem applications such as Whiteboard, Display, and Manager, you have complete control over huddle management, wireless content casting, and device settings wherever you are.

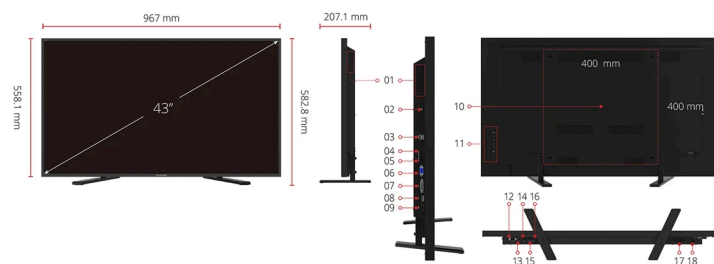

1. Internal Speakers
2. USB Type-C
3. USB 2.0 Touch (Type-B)
4. Audio Out

8. DisplayPort
9. HDMI 2.0
10. VESA 400x400
11. Menu Controls

15. SMART USB
16. SPDIF
17. AC In
18. Power

5. PC Line-In
6. VGA
7. DVI-D

12. RS232
13. LAN
14. USB 2.0 (Type-A)

Visit Us

www.viewsonic.com



DISPLAY

Panel Size:	43"
Panel Type:	TFT LCD Module with ELED Backlight
Display Area (mm):	941.184 (H) x 529.416 (V) (42.51" diagonal)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors (10bit)
Brightness:	350 nits (typ.)
Contrast Ratio:	1000:1
Response Time:	9 ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	30,000 Hours (Typ)
Surface Treatment:	Anti-Glare4H hardness
Bezel:	L:10.9/R:10.9/T:10.9/B:13.8 mm
Orientation:	Landscape

PLATFORM

Processor:	ARM Cortex A73 + A53
RAM:	3GB DDR4
Storage:	16 GB

TOUCH

Type/ Tech:	LGD In-cell 10 points touch
Touch Resolution:	32767 x 32767
Touch Point:	Windows/Android: 10 points touch

INPUT

HDMI:	2.0 x1 (3840x2160 @60Hz)
RGB / VGA:	x1
DisplayPort:	x1
DVI:	x1
Audio:	x1 (PC audio in, 3.5mm jack)
RS232:	x1

OUTPUT

Audio:	x1 (Earphone out)
SPDIF:	x1 (Fiber)

LAN

RJ45:	x1
-------	----

USB

Type A:	USB2.0 Bottom x2
Type B:	x1 for HDMI/DP/DVI/VGA touch
Type C:	x1 (DP1.2, 60W power delivery)

SPEAKERS

10W x 2

COMPATIBILITY

RGB PC/HDMI PC:	1080p/4K @ 60Hz
HDMI:	3840x2160 @ 60Hz
DisplayPort:	3840x2160 @ 60Hz

BUNDLE SOFTWARE

Basic Annotation Software:	myViewBoard Whiteboard for Android
Wireless Presentation:	ViewBoard Cast & myViewBoard Display

SPECIAL FEATURES

All-in-one USB port:	Bottom "Smart USB" port for all channels.
----------------------	---

POWER

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	On:120W(typ.) / Off: <0.5W

ERGONOMICS

Wall Mount (VESA®):	400 x 400
---------------------	-----------

OPERATING CONDITIONS

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH Non-Condensing

DIMENSIONS (W X H X D)

Physical (inch / mm):	967 x 558.1 x 55.7 mm / 38.072 x 21.973 x 2.193 in. (w/o Stand); 967 x 582.8 x 207.1 mm / 38.072 x 22.943 x 8.155 in. (with Stand)
Packaging (inch / mm):	1200 x 785 x 210 mm / 47.24 x 30.91 x 8.27 in.

WEIGHT

Net (lb / kg):	17.83 kg / 39.3 lbs (w/o Stand); 18.41 kg / 40.59 lbs (with Stand)
Gross (lb / kg):	22.63 kg / 49.89 lbs

REGULATIONS

cULus, FCC, Energy Star, CEC, Mexico Energy, CE, CB, RoHS, RACH

PACKAGE CONTENTS

1. IFP4320
2. Power Cables (1.8 M)
3. Remote Control with batteries
4. Quick Start Guide
5. Stand (STND-056)
6. HDMI cable (1.0M)
7. USB Type-C Cable (1.0 M)
8. USB Touch Cable (1.0 M) (Type A – Type B)
9. RS232 Adapter (Female to Female)



DVI:

3840x2160 @ 30Hz

EMBEDDED OS

Android 8.0

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.

